


L±2"(L±50)

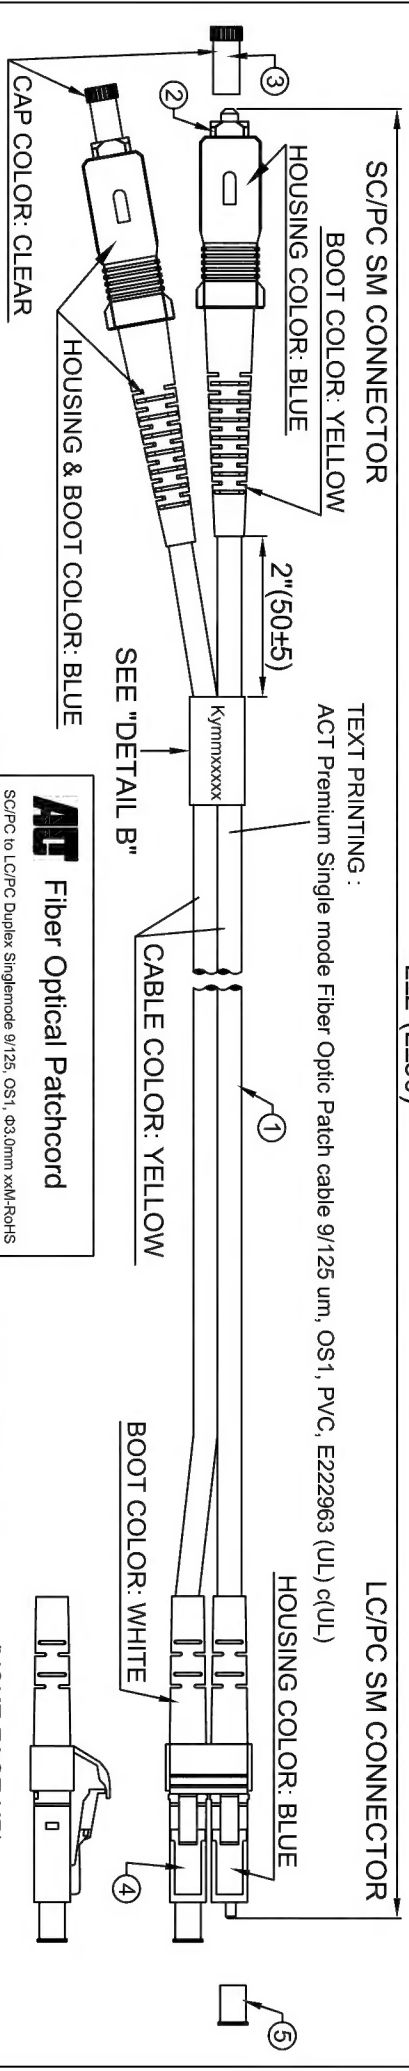

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

AE Fiber Optical Patchcord

SC/PC to LC/PC Duplex Singlemode 9/125, OS1, Ø3.0mm xXM-RoHS

Model: xxxxx -xxxxx

Lot number: P01NO

Performance: (@23℃) λ=850/1310±20nm

Insertion Loss ≤ 0.3dB

850nm 1310nm

Serial No

A B C D

Kymmmxxx

Prepared By: Date:


1"(25.0)

0.71"(18)

1.77"(45.0)

Kymmmxxx

ROUND CABLE METHOD SEE "DETAIL A"	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TESC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

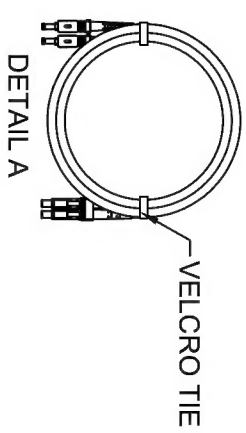

DETAIL B

y: Year, mm: Month

xxxx: Serial Number

5	2PCS	LC DUST COVER, WHITE.
4	2SETS	CONNECTOR, LC/PC SM BLUE HOUSING WITH WHITE BOOT.
3	2PCS	SC DUST COVER, CLEAR.
2	2SETS	CONNECTOR, SC/PC SM, BLUE HOUSING WITH YELLOW & BLUE BOOT.
1	1PC	CABLE: SINGLEMODE, 9/125um, 3.0mm ZIPCORDER, OFNR, YELLOW JACKET.
ITEM	QTY	PART NO. DESCRIPTION
PART LISC		

RL8920	20	20	65.6'(20000)	941220-RL8920	8716065224597
RL8915	15	15	49.2'(15000)	941215-RL8915	8716065224580
RL8910	10	10	32.8'(10000)	941210-RL8910	8716065224573
RL8905	05	5	16.4'(5000)	941205-RL8905	8716065224566
RL8903	03	3	9.84'(3000)	941203-RL8903	8716065224559
RL8902	02	2	6.56'(2000)	941202-RL8902	8716065224542
RL8951	51	1.5	4.92'(1500)	9412015-RL8951	8716065224535
RL8901	01	1	3.28'(1000)	941201-RL8901	8716065224528
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL: DATE:

UNIT: Inches[mm]

DRAWN BY: Catherine DATE: 2007/10/4

CHECKED BY: DATE:

APPROVED BY: DATE:

SALE BY: DATE:

TITLE: PATCHCORD SC-LC SINGLEMODE DUPLEX 9/125, OS1, 3.0mm, YELLOW.

CUSTOMER CUSTOMER PART NO. RL89**

DRAWING NO. PK709022 Ref. NO. REV. A

TRENDX PART NO.